

# NP 2951BA | Product Data Sheet


## Acrylic-Based Adhesive Tapes

**1/32 in. black closed cell, cross linked polyethylene foam coated on both sides with a high shear acrylic based adhesive. Easy release 4 mil poly liner.**

### FEATURES & BENEFITS

- **Very high bond strength**
- **High shear**
- **Adheres well to irregular surfaces**
- **Conformable**
- **Excellent UV and temperature resistance**
- **Service Temperature ~ -20°F to 200°F**

### CONSTRUCTION DIAGRAM

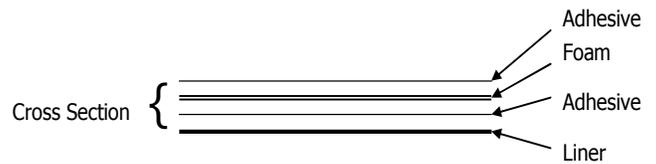

### TYPICAL APPLICATIONS

- Plastic extrusion
- Wire mounts
- Window glazing
- Trim
- Wire raceways
- SDL muntin bars

### CONSTRUCTION

Acrylic Adhesive
1/32" Cross-Linked Closed Cell PE Foam
Acrylic Adhesive
Blue Poly Liner

### PERFORMANCE

Tensile Strength (psi) S252	50
Dynamic Shear (psi) S253	70
180° Peel (oz/in) PSTC-101	75
Static Shear S217 (PSTC-107*) *Modified	Minimum Requirement 5 psi for 100+ hours
Probe Tack ASTM D-2979-01	800**

\*\* Tack numbers may not be exact value of tack as foam can tear during tack test. Please contact our sales staff for any assistance.

**Tape Specialists of Florida, Inc. (TSF)**  
**3909 W. South Ave. Tampa, Fl. 33614 Phn: 813-870-3171 Fax: 813-870-6896**